

Wieland-K78

CuNi2Co1Si | C70350

Wieland-K78 is a high-performance alloy that is produced to very high strength tempers exceeding K55 & K57 due to the increased Ni, Si and Co content. The precipitation of silicides, which are distributed uniformly through the entire length of the strip delivers high strength levels, good conductivity and excellent resistance to thermal stress relaxation. K78 is a superior solution for miniaturized connectors that require high spring forces such as CPU sockets, interposers, board to board connectors as well as relays & switches. Thicknesses are produced down to very thin gauges of 0.05 mm.

Chemical composition (Reference)

Ni	2.4 %
Si	0.95 %
Co	1.3 %
Cu	remainder

Physical properties (Reference values at room temperature)


Electrical conductivity	24 MS/m	41 %IACS
Thermal conductivity	181 W/(m·K)	105 Btu·ft/(ft ² ·h·°F)
Coefficient of electrical resistance*	1.8 10 ⁻³ /K	1.0 10 ⁻³ /°F
Coefficient of thermal expansion*	17.6 10 ⁻⁶ /K	9.8 10 ⁻⁶ /°F
Density	8.82 g/cm ³	0.319 lb/in ³
Modulus of elasticity	130 GPa	18,850 ksi
Specific heat	0.390 J/(g·K)	0.093 Btu/(lb·°F)
Poisson's ratio	0.34	0.34

* Between 0 and 300 °C


Mechanical properties (values in brackets are for information only)

Temper	Tensile strength R _m		Yield strength R _{p0.2}		Elongation A ₅₀	Hardness HV
	MPa	ksi	MPa	ksi		
R920	920 - 1040	133 - 151	≥ 880	≥ 128		(260-320)

Electrical conductivity

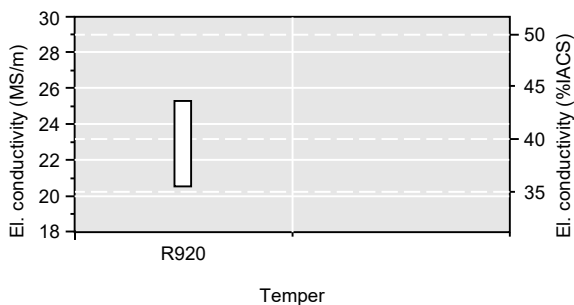


Bendability (Strip thickness t ≤ 0.1 mm)

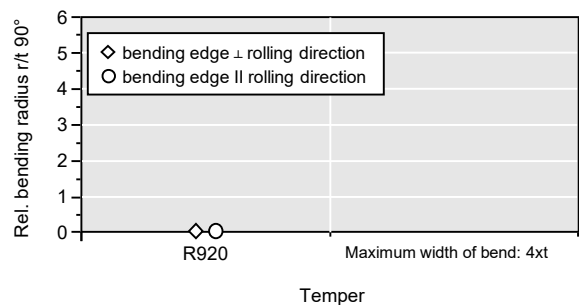

Wieland-K78

CuNi2Co1Si | C70350

Thermal stress relaxation

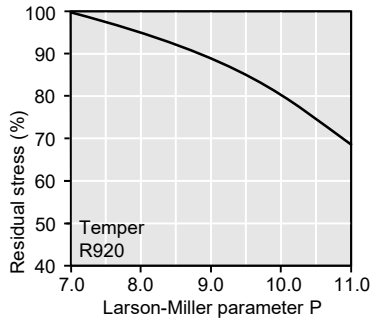

Stress remaining after thermal relaxation as a function of Larson-Miller parameter P

(F. R. Larson, J. Miller, Trans ASME74 (1952) 765–775) given by:
 $P = (20 + \log(t))(T + 273) \cdot 0.001$

Time t in hours, temperature T in °C.

Example: P = 9 is equivalent to 1,000 h/118 °C.

Measured on stress relief annealed specimens parallel to rolling direction.

Total stress relaxation depends on the applied stress level.

Furthermore, it is increased to some extent by cold deformation.

Fatigue strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10^7 load cycles under symmetrical alternate load without breaking. It is dependent on the temper tested and is about 1/3 of the tensile strength R_m .

Types and formats available

- Standard coils with outside diameters up to 1,400 mm
- Traverse-wound coils with drum weights up to 1.5 t
- Multicoil up to 5 t
- Hot-dip tinned strip

Dimensions available

- Strip thickness 0.05-0.30 mm, other gauges on request
- Strip width from 3 mm, however min. 10 x strip thickness

Wieland-Werke AG | Graf-Arco-Straße 36 | 89079 Ulm | Germany

info@wieland.com | wieland.com

Wieland Rolled Products North America | 4803 Olympia Park Plaza, Suite 3000 | Louisville, Kentucky | USA

infona@wieland.com | wieland-rolledproductsna.com

This printed matter is not subject to revision. No claims can be derived from it unless there is evidence of intent or gross negligence. The product characteristics are not guaranteed and do not replace experts' advice.