

**Material Designation**

EN	no EN standard
UNS*	C18070

\* Unified Numbering System (USA)

**Chemical Composition (Reference)**

Cr	0.3 %
Ti	0.1 %
Si	0.02 %
Cu	balance

**Typical Applications**

- Components for the electrical industry
- Stamped parts
- Relay springs
- Semiconductor components
- Connectors suitable for use at elevated temperatures

**Physical Properties\***

Electrical Conductivity	MS/m	45
	%IACS	78
Thermal Conductivity	W/(m·K)	310
Coefficient of Electrical Resistance**	10 <sup>-3</sup> /K	3.0
Coefficient of Thermal Expansion**	10 <sup>-6</sup> /K	18.0
Density	g/cm <sup>3</sup>	8.88
Modulus of Elasticity	GPa	138
Specific Heat	J/(g·K)	0.385
Poisson's Ratio		0.34

\* Reference values at room temperature

\*\* Between 0 and 300 °C

**Fabrication Properties**

Capacity for Being Cold Worked	good
Machinability	less suitable
Capacity for Being Electroplated	good
Capacity for Being Hot-Dip Tinned	good
Soft Soldering	good
Resistance Welding	fair
Gas Shielded Arc Welding	excellent
Laser Welding	fair


**Corrosion Resistance**

Wieland-K75® is resistant to pure water vapour and non oxidizing acids and alkalis as well as neutral saline solutions. The material is insensitive to stress corrosion cracking.


**Mechanical Properties**

Temper		R400	R460	R530	R550
Tensile Strength R <sub>m</sub>	MPa	400–480	460–560	530–610	550–630
Yield Strength R <sub>p0.2</sub>	MPa	≥ 300	≥ 400	≥ 460	≥ 520
Elongation A <sub>50mm</sub>	%	≥ 8	≥ 9	≥ 10	≥ 10
Hardness HV (for information only)		(120–150)	(140–170)	(150–190)	(150–190)

**Electrical Conductivity**

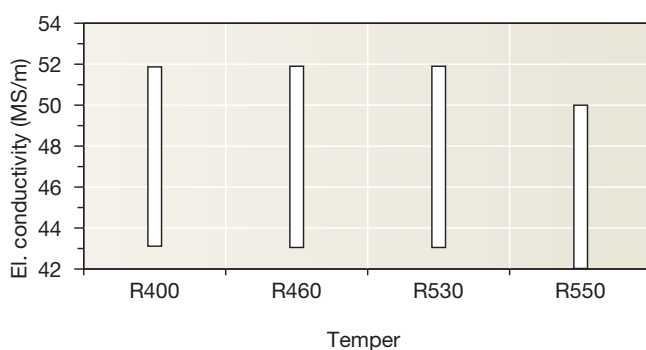



**Bendability (Strip Thickness t ≤ 0.5 mm)** ◇○ 90° ◆● 180°

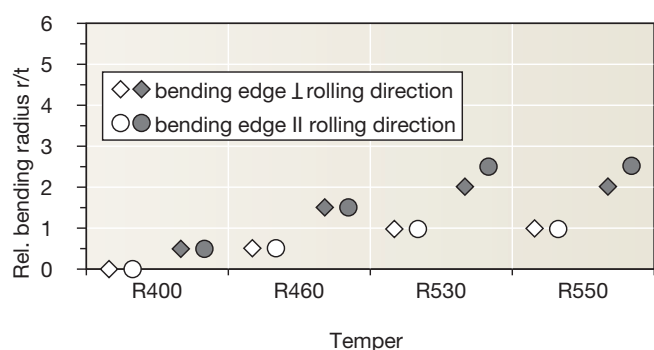

# Wieland-K75®


CuCrSiTi  
C18070

## Resistance to Softening

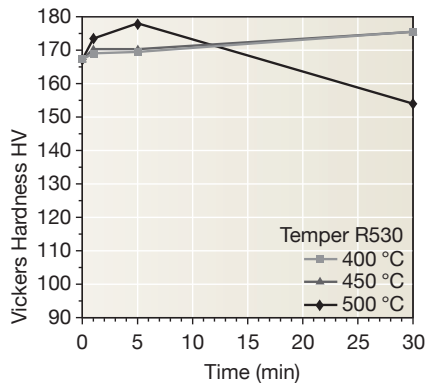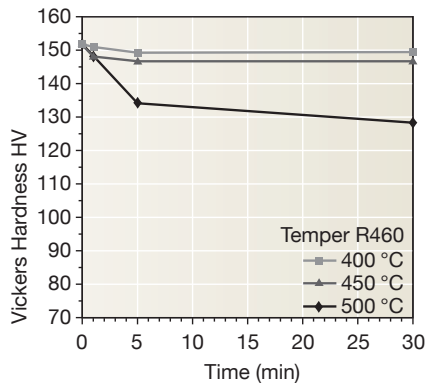

Vickers hardness after heat treatment (typical values)

## Thermal Stress Relaxation

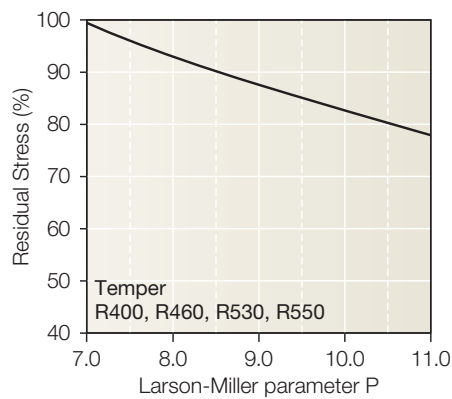

Stress remaining after thermal relaxation as a function of Larson-Miller parameter (F. R. Larson, J. Miller, Trans ASME74 (1952) 765–775) given by:  
 $P = (20 + \log(t)) \cdot (T + 273) \cdot 0.001$   
 Time t in hours, temperature T in °C.  
 Example: P = 9 is equivalent to 1.000 h/118 °C.

Measured on stress relief annealed specimens parallel to rolling direction. Total stress relaxation depends on the applied stress level. Furthermore, it is increased to some extent by cold deformation.

## Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for  $10^7$  load cycles under symmetrical alternate load without breaking. It is dependent on the temper tested and is about  $\frac{1}{3}$  of the tensile strength  $R_m$ .

## Types and Formats Available

- Standard coils with outside diameters up to 1400 mm
- Traverse-wound coils with drum weights up to 1.5 t
- Multicoil up to 5 t
- Hot-dip tinned strip
- Contour-milled strip
- Sheet
- Strip and sheet with protective coating

## Dimensions Available

- Strip thickness from 0.10 mm, thinner gauges on request
- Strip width from 3 mm, however min. 10 x strip thickness