

Wieland-B16

CuSn6 | C51100

Material Designation

| | |
|------|--------|
| EN | CW452K |
| UNS* | C51900 |

*Unified Numbering System (USA)

Chemical Composition (Reference)

| | |
|----|---------|
| Sn | 6 % |
| Cu | balance |

Typical Applications

- Stamped parts
- Connectors
- Contact springs

Physical Properties*

| | | |
|--|---------------------|-------|
| Electrical Conductivity | MS/m | 10 |
| | %IACS | 17 |
| Thermal Conductivity | W/(m·K) | 75 |
| Coefficient of Electrical Resistance** | 10 ⁻³ /K | 0,7 |
| Coefficient of Thermal Expansion** | 10 ⁻⁶ /K | 18,5 |
| Density | g/cm ³ | 8,85 |
| Modulus of Elasticity | GPa | 118 |
| Specific Heat | J/(g·K) | 0,377 |
| Poisson's Ratio | | 0,34 |

*Reference values at room temperature

**Between 0 and 300 °C

Fabrication Properties

| | |
|-----------------------------------|---------------|
| Capacity for Being Cold Worked | excellent |
| Machinability | less suitable |
| Capacity for Being Electroplated | excellent |
| Capacity for Being Hot-Dip Tinned | excellent |
| Soft Soldering | excellent |
| Resistance Welding | good |
| Gas Shielded Arc Welding | good |
| Laser Welding | good |

Corrosion Resistance

Resistant to seawater and industrial atmosphere. Largely insensitive to stress corrosion cracking.


Mechanical Properties

| Temper | | R350 | R420 | R500 | R560 | R640 | R7250 |
|----------------------------------|-----|---------|---------|---------|---------|---------|-------|
| Tensile Strength R _m | MPa | 350-420 | 420-520 | 500-590 | 560-650 | 640-730 | ≥ 720 |
| Yield Strength R _{p0,2} | MPa | ≤ 300 | ≥ 360 | ≥ 460 | ≥ 530 | ≥ 610 | ≥ 690 |
| Elongation A _{50mm} | % | ≥ 45 | ≥ 17 | ≥ 8 | ≥ 5 | ≥ 3 | - |


Intermediate tempers are feasible. Higher elongation values can be obtained by additional heat treatments.

| Temper | H080 | H125 | H160 | H180 | H200 | H220 |
|-------------|--------|---------|---------|---------|---------|-------|
| Hardness HV | 80-110 | 125-165 | 160-190 | 180-210 | 200-230 | ≥ 220 |

Electrical Conductivity

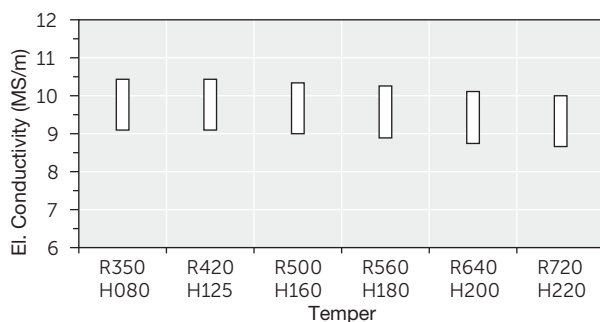



Bendability (Strip Thickness t ≤ 0.5 mm)

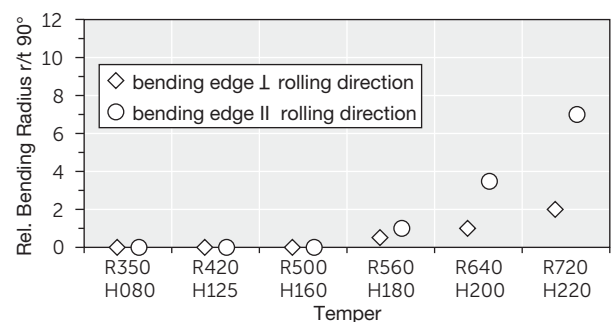

Wieland-B16


CuSn6 | C51100

Resistance to Softening (for Information)

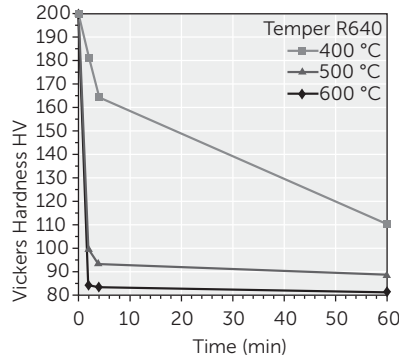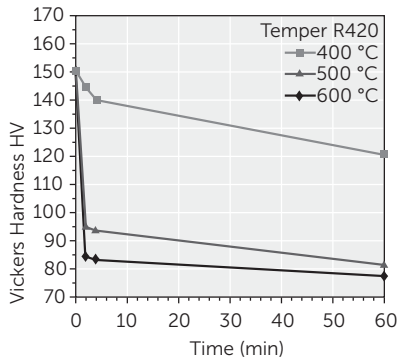

Vickers hardness after heat treatment (typical values)

Thermal Stress Relaxation

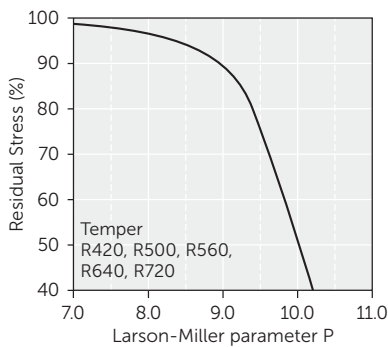

Stress remaining after thermal relaxation as a function of Larson-Miller parameter P (

F. R. Larson, J. Miller, Trans ASME74 (1952) 765–775) given by:

$$P = (20 + \log(t)) \cdot (T + 273) \cdot 0.001$$

Time t in hours, temperature T in °C.

Example: P = 9 is equivalent to 1.000 h/118 °C.

Measured on stress relief annealed specimens parallel to rolling direction.

Total stress relaxation depends on the applied stress level.

Furthermore, it is increased to some extent by cold deformation.

Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10^7 load cycles under symmetrical alternate load without breaking. It is dependent on the temper tested and is about $\frac{1}{3}$ of the tensile strength R_m .

Types and Formats Available

- Standard coils with outside diameters up to 1.400 mm
- Traverse-wound coils with drum weights up to 1.5 t
- Multicoil up to 5 t
- Hot-dip tinned strip
- Contour-milled strip
- Sheet
- Strip and sheet with protective coating

Dimensions Available

- Strip thickness from 0.10 mm, thinner gauges on request
- Strip width from 3mm, however min. 10 x strip thickness

Wieland-Werke AG

www.wieland.de

Graf-Arco-Str. 36, 89079 Ulm, Germany, Phone +49 731 944 2030, info@wieland.com

This printed matter is not subject to revision. No claims can be derived from it unless there is evidence of intent or gross negligence. The product characteristics are not guaranteed and do not replace our experts' advice.