

Wieland-Z21

CuZn38Pb2 | C35000

Material designation

EN	CW608N
UNS*	C35000

*Unified Numbering System (USA)

Chemical composition (Reference)

Cu	60.5 %
Pb	1.8 %
Zn	balance

Typical applications

- Precision mechanical components
- Watch and clock parts
- Milled parts

Physical properties*

Electrical conductivity	MS/m	14
	%IACS	24
Thermal conductivity	W/(m·K)	109
Coefficient of electrical resistance**	10 ⁻³ /K	1.7
Coefficient of thermal expansion**	10 ⁻⁶ /K	20.4
Density	g/cm ³	8.44
Modulus of elasticity	GPa	102
Specific heat	J/(g·K)	0.377
Poisson's ratio		0.34

* Reference values at room temperature

** Between 0 and 300 °C

Fabrication properties

Capacity for being hot worked	excellent
Machinability	excellent
Capacity for being electroplated	excellent
Capacity for being hot-dip tinned	excellent
Soft soldering	excellent
Resistance welding	fair
Gas shielded arc welding	less suitable
Laser welding	less suitable

Corrosion resistance

Good resistance to: fresh water, neutral or alkaline saline solutions, organic compounds as well as land, sea, and industrial atmosphere.


Not resistant to: acids, hydrous sulphur compounds, hydrous ammonia (stress corrosion cracking) in the non-stress-relieved condition. It is, however, susceptible to dezincification due to the two-phase α/β -structure.

Mechanical properties

Temper		R340	R400	R470	R540
Tensile strength R_m	MPa	340-420	400-480	470-550	≥ 540
Yield strength $R_{p0.2}$	MPa	≤ 240	≥ 200	≥ 390	≥ 490
Elongation A_{50mm}	%	≥ 33	≥ 14	≥ 5	-

Temper	H075	H110	H140	H165
Hardness HV	75-110	110-140	140-170	≥ 165


Electrical conductivity

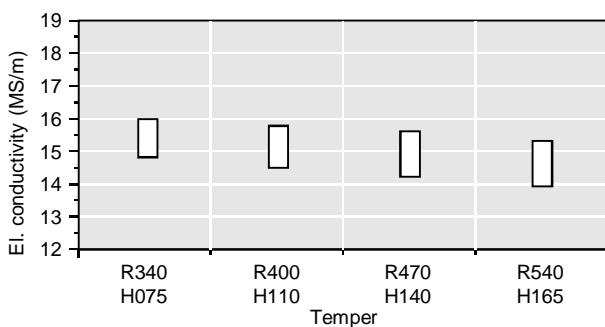

Wieland-Z21

CuZn38Pb2 | C35000

Softening resistance

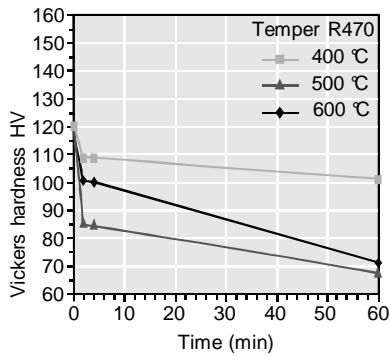

Vickers hardness after heat treatment
(typical values)

Fatigue strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10^7 load cycles under symmetrical alternate load without breaking. It is dependent on the temper tested and is about 1/3 of the tensile strength R_m .

Types and formats available

- Standard coils with outside diameters up to 1,400 mm
- Contour-milled strip
- Sheet
- Strip and sheet with protective coating

Dimensions available

- Strip thickness from 0.20 mm
- Strip width from 3 mm, however min. 10 x strip thickness